


Heptagonal face mill with 14 double-sided corners

RM14

KORLOY
TECH-NEWS

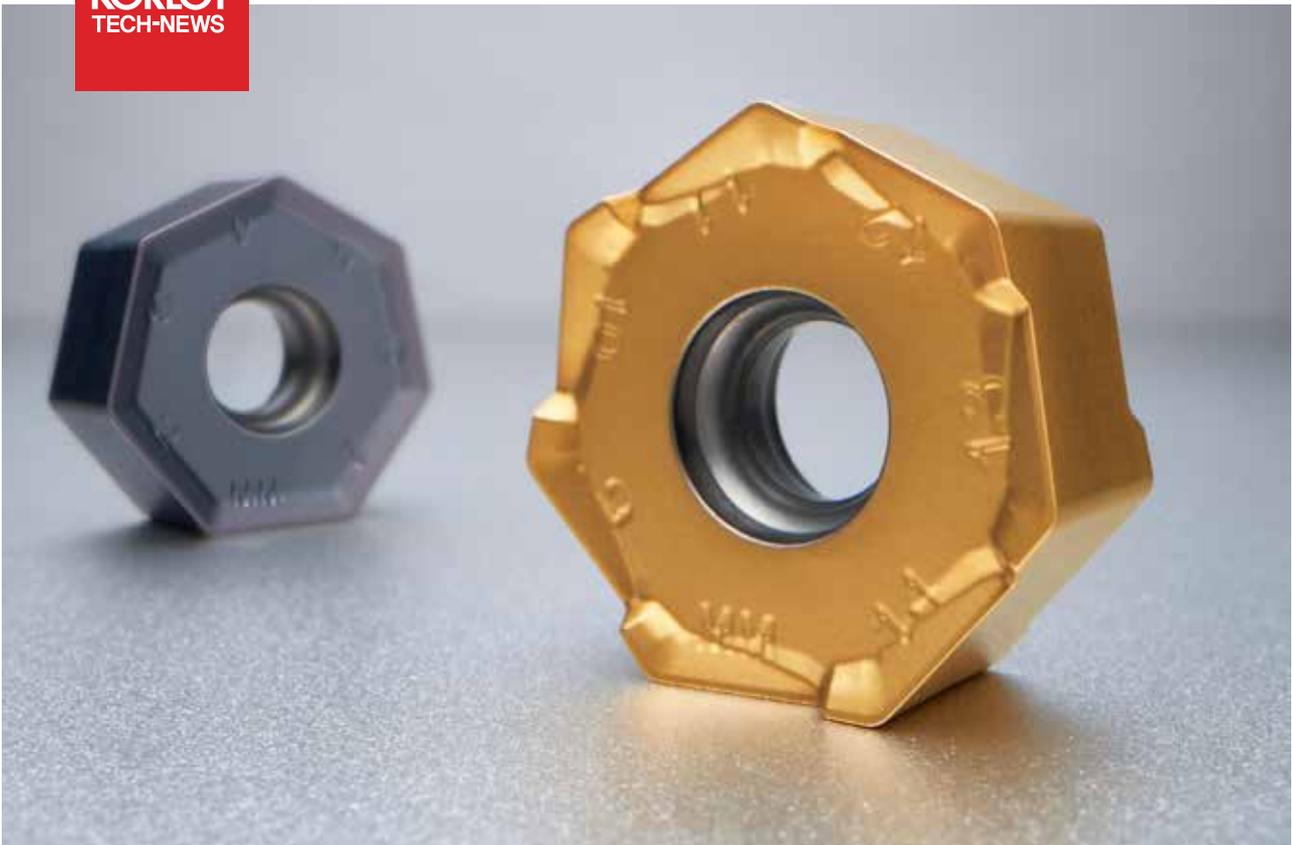

- Minimized chattering of workpiece due to maximum lead angle and sharp cutting edge
- Reduced cutting resistance and improved chip emissions by high helix angle application

Heptagonal face mill with 14 double-sided corners

RM14

In the various industries including automotive components business, workpieces are manufactured with casting for easy-producing complicated shapes and lowering cost. However, due to the characteristic of casting manufacturing, facing is necessary on each uneven facing surface for assembling.

In casting machining, complicated shapes of workpiece and uneven surface creates low clamping force, chattering, unstable tool life, bad surface finish and even shortening life of equipment. KORLOY launches the double-sided face mill, RM14 to solve those troubles in machining.

RM14 designed with the maximum lead angle, 51° of heptagonal shape reduces cutting load and chattering

comparing to the conventional face mill with lead angle, 45°. Its strong wedge type clamping system ensures stable tool life even in poor cutting conditions.

In addition, there are two types of RM14 insert which are neutral (flat cutting edge) and right-handed (helix cutting edge) and it is possible for both of them to clamp to a single holder. The thicker RM14 insert with sharp cutting edge ensures good performance and stability and its optimal grade realizes long tool life.

RM14 is an economic tool using maximum 14 corners and ensures stable machining and high productivity.



Good performance

- Less cutting load due to high rake and high helix

Improved surface finish

- Less chattering due to lead angle of 51°
- Good chip evacuation

Stable tool life

- High rigidity from thick insert

Stable clamping system

- Wide supporting area and acute angled clamping structure

Code system

Cutter type

RM	14	X	C	M	080	R	27	7	XN06
Rich Mill	No. of edges 14: 14 edges	Approach angle X: Speziell (51°)	Type C: Cutter	Arbor type M: Metric A: Inch None: Asia	Tool Dia. 080: 80 mm	Coolant type & hand R: Coolant, right-handed NR: No coolant, righthanded	Internal Ø 27: Ø27 mm	No. of tooth 7: 7 teeth	Insert XN06: XNMX06

Recommended grade and cutting edge

● : 1st recommendation

Type	P			M			K		
	Type	C/B	Grade	Type	C/B	Grade	Type	C/B	Grade
Helix	●	○ ML ● MM	● PC3700 ○ PC5300 ○ PC5400	○	○ ML ○ MM	● PC9540 ○ PC5300	●	● ML ○ MM	● PC6510 ○ PC5300 ○ NCM535
Flat	○	○ ML ○ MM	● PC3700 ○ PC5300 ○ PC5400	●	● ML ○ MM	● PC9540 ○ PC5300	○	○ ML ○ MM	● PC6510 ○ PC5300 ○ NCM535

Recommended cutting conditions

ISO	Workpiece			Specific cutting force (N/mm ²)	Brinell hardness (HB)	Grade	C/B		Grade	C/B		ML / MM
	Workpiece material	ISO	KS			PC3700	ML	MM	PC5300	ML	MM	
						vc (m/min)	fz (mm/t)		vc (m/min)	fz (mm/t)		
P	Carbon steel Mn < 1.65	C25	SM25C	1500	125	160	0.25	0.3	150	0.25	0.3	1-3
						215	0.2	0.2	195	0.2	0.2	
						270	0.1	0.1	240	0.1	0.1	
		C45	SM45C	1700	190	160	0.25	0.3	150	0.25	0.3	
						215	0.2	0.2	195	0.2	0.2	
						270	0.1	0.1	240	0.1	0.1	
	Low alloy steel ≤ 5%	42CrMo4	SCM440	1700	175	160	0.25	0.3	150	0.25	0.3	
						215	0.2	0.2	195	0.2	0.2	
						270	0.1	0.1	240	0.1	0.1	
	High alloy steel > 5%	X40CrMoV5-1	STD11 STD61	1950	200	150	0.2	0.25	130	0.2	0.25	1
						195	0.15	0.2	170	0.15	0.2	
						240	0.1	0.1	210	0.1	0.1	

Recommended cutting conditions

Workpiece				Specific cutting force (N/mm ²)	Hardness (HB)	Grade	C/B		Grade	C/B		ML / MM
ISO	Workpiece material	ISO	KS			PC9540	ML	MM	PC5300	ML	MM	
						vc (m/min)	fz (mm/t)		vc (m/min)	fz (mm/t)		ap (mm)
M	Ferritic / Martensitic series	X6CrAl13 X6Cr17	STS405 STS430	1800	200	120	0.2	0.25	120	0.2	0.25	1-3
						160	0.1	0.15	160	0.1	0.15	
						200	0.05	0.1	200	0.05	0.1	
		X12CrS13 X6CrMo17-1	STS416 STS434	2850	330	110	0.22	0.25	110	0.22	0.25	
						150	0.12	0.15	150	0.12	0.15	
						190	0.05	0.1	190	0.05	0.1	
	X12Cr13	STS403 STS410	2350	330	100	0.2	0.25	100	0.2	0.25		
					140	0.1	0.15	140	0.1	0.15		
					180	0.05	0.1	180	0.05	0.1		
	Austenite series	X5CrNi18-9 X5CrNiMo17-12-2 XCrNiMo17-12-3	STS304 STS316	2000	180	70	0.2	0.25	90	0.2	0.25	
						95	0.1	0.15	120	0.1	0.15	
						120	0.05	0.1	150	0.05	0.1	
Austenite-ferritic series (Duplex)	-	-	2450	260	60	0.2	0.25	70	0.2	0.25		
					80	0.1	0.15	95	0.1	0.15		
					110	0.05	0.1	120	0.05	0.1		

Workpiece				Specific cutting force (N/mm ²)	Hardness (HB)	Grade	C/B		Grade	C/B		ML / MM
ISO	Workpiece material	ISO	KS			PC6510	ML	MM	PC5300	ML	MM	
						vc (m/min)	fz (mm/t)		vc (m/min)	fz (mm/t)		ap (mm)
K	Gray cast iron	200	GC200	900	180	140	0.25	0.3	120	0.25	0.3	1-3
						180	0.2	0.2	160	0.2	0.2	
						230	0.1	0.1	200	0.1	0.1	
	Ductile cast iron	500-7	GCD500	870	155	120	0.25	0.3	110	0.25	0.3	
						160	0.2	0.2	145	0.2	0.2	
200	0.1	0.1	180	0.1	0.1							

Features of insert per types

Type	Feature	Application range
	<ul style="list-style-type: none"> Right handed type High helix cutting edge 	<ul style="list-style-type: none"> 1st recommended for P and K series cutting For high speed and high feed machining
	<ul style="list-style-type: none"> Neutral type Flat cutting edge 	<ul style="list-style-type: none"> 1st recommended for M series cutting Applicable for both right handed and left handed


Features

Insert features

- Wide supporting area of insert ensures stable clamping system
- High rake angle cutting edge reduces cutting load and increases chip evacuation
- Thicker insert realizes stability in machining

Wider clamping area
- More stable machining

High helix cutting edge
- Better machinability
- Less cutting load

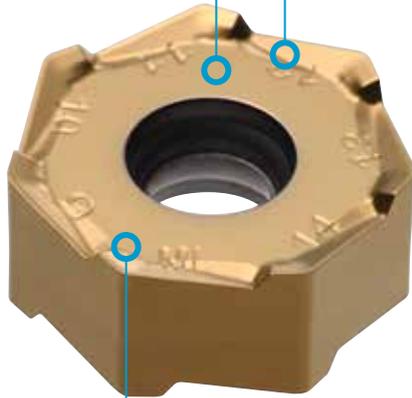

High rake angle chip breaker
- Less cutting load
- Better chip evacuation




Thicker insert
- High cutting edge strength

Cutter features

- The biggest heptagonal lead angle reduces chatter in machining
- Wedge type clamping system ensures stable clamping
- Stepped machining is available without interruption of side wall of insert




The biggest heptagonal lead angle
- Reduced workpiece chattering by reducing axial force

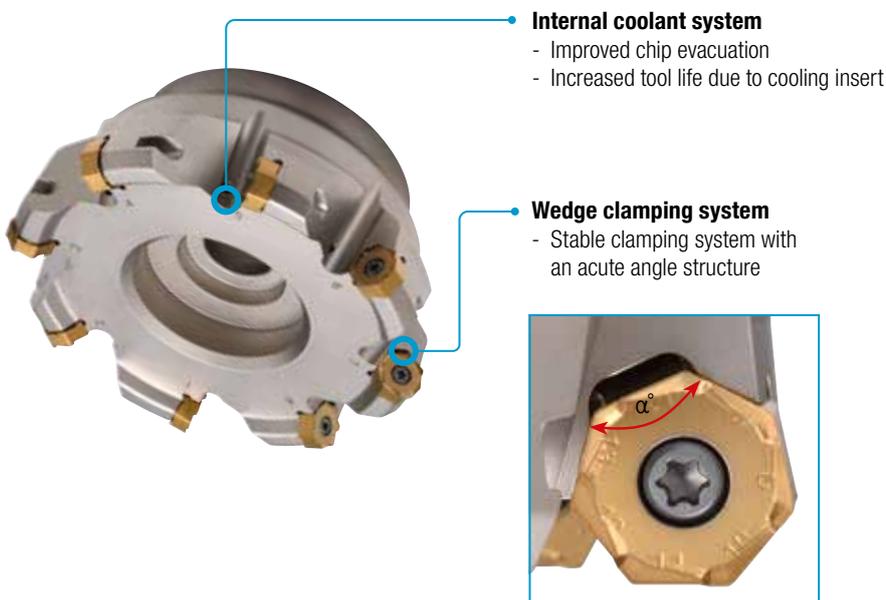

Internal coolant system
- Improved chip evacuation
- Increased tool life due to cooling insert

Wedge clamping system
- Stable clamping system with an acute angle structure

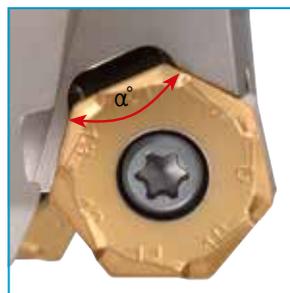


Preventing interruption of side wall
- Prevented interruption of side wall by using the most number of corners in deep facing (heptagonal 14 double-sided corners)


Performance evaluation

Wear resistance


- Workpiece** Ductile cast iron (GGG-60)
- Cutting condition** $vc = 250 \text{ m/min} \cdot fz = 0.2 \text{ mm/U} \cdot ap = 2.0 \text{ mm} \cdot \text{wet}$
- Tools** **Insert** XNMX0606XNR-ML (PC6510) **Holder** RM14XCM080R-27-6-XN06

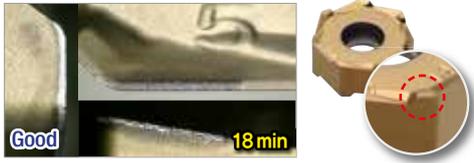

RM14

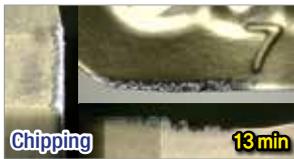


Competitor

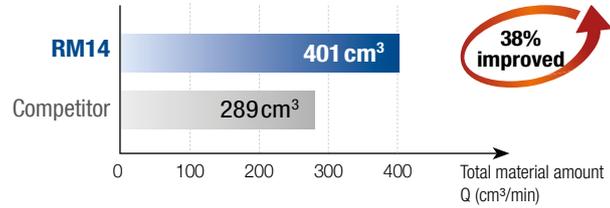


Total material amount Q: 22.3 cm³/min
Cutting time: 18 min

Wear resistance


- Workpiece** Heat resistance stainless steel
- Cutting condition** $vc = 100 \text{ m/min} \cdot fz = 0.2 \text{ mm/U} \cdot ap = 2.0 \text{ mm} \cdot \text{dry}$
- Tools** **Insert** XNMX060608-ML (PC9540) **Holder** RM14XCM080R-27-6-XN06

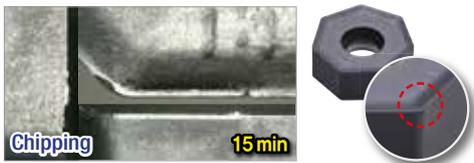

RM14

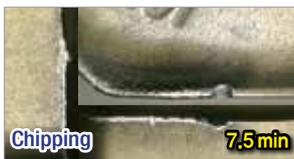

Competitor

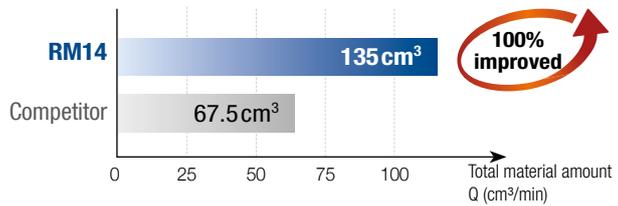

Total material amount Q: 9.0 cm³/min
Cutting time: 15 min

Surface finish

- Workpiece** Stainless steel (X5CrNiMo17-12 - 2)
- Cutting condition** $vc = 100 \text{ m/min} \cdot fz = 0.15 \text{ mm/U} \cdot ap = 2.0 \text{ mm} \cdot ae = 50 \text{ mm} \cdot \text{dry}$
- Tools** **Insert** XNMX0606XNR-ML (PC9540) **Holder** TRM14XCM080R-27-6-XN06



RM14






Competitor

Performance evaluation

Wear resistance




- **Workpiece** Carbon steel (C45)
- **Cutting condition** $vc = 200 \text{ m/min} \cdot fz = 0.2 \text{ mm/U} \cdot ap = 2.0 \text{ mm} \cdot \text{wet}$
- **Tools** **Insert** XNMX0606XNR-ML (PC6510) **Holder** RM14XCM080R-27-6-XN06

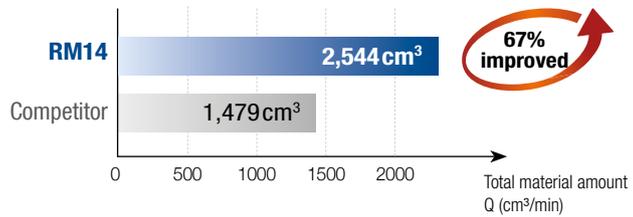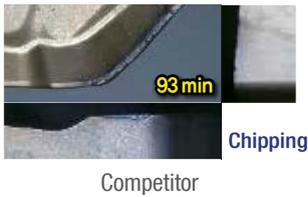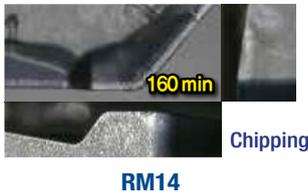

Total material amount Q: 15.9 cm³/min
Cutting time: 160 min

Wear resistance


- **Workpiece** Alloy steel (42CrMo4)
- **Cutting condition** $vc = 200 \text{ m/min} \cdot fz = 0.2 \text{ mm/U} \cdot ap = 3.0 \text{ mm} \cdot \text{dry}$
- **Tools** **Insert** XNMX060608-MM (PC5300) **Holder** RM14XCM080R-27-6-XN06

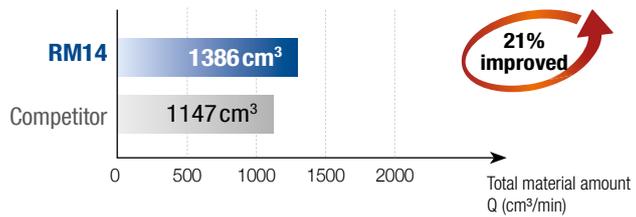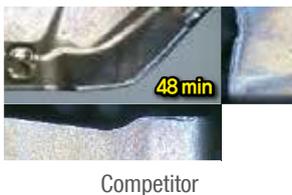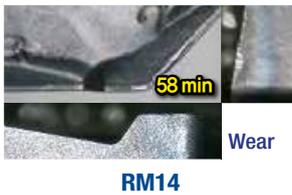

Total material amount Q: 23.9 cm³/min
Cutting time: 58 min


Wear resistance

- **Workpiece** Stainless steel (X12Cr13)
- **Cutting condition** $vc = 165 \text{ m/min} \cdot fz = 0.15 \text{ mm/U} \cdot ap = 2.0 \text{ mm} \cdot ae = 50 \text{ mm} \cdot \text{dry}$
- **Tools** **Insert** XNMX060608-MM (PC5300) **Holder** RM14XCM080R-27-6-XN06

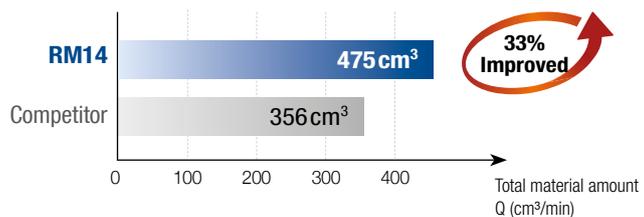

Total material amount Q: 9.9 cm³/min
Cutting time: 48 min

Tool selection guide

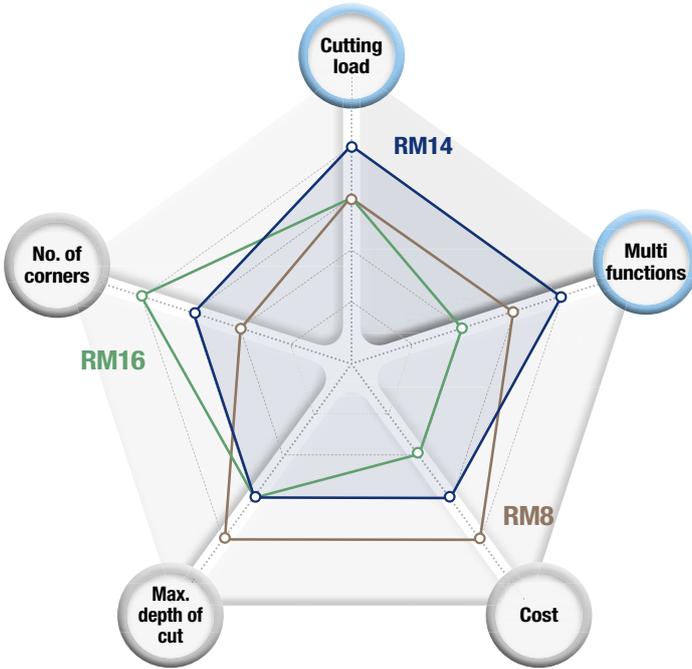

RM14

- Less cutting load
- Multi-functional machining (preventing interruption in deep machining)



RM8

- The maximum depth of cut
- High competitive price



RM16

- The most no. of corners




Tools	Cutting load	Multi functions	Cost	Max. depth of cut	No. of corners
RM14	★★★★★	★★★★★	★★★	★★★	★★★
RM8	★★★	★★★	★★★★★	★★★★★	★★
RM16	★★★	★★	★★	★★★	★★★★★

Insert

Insert	Designation	Dimension					Grade						Geometry
		IC	BS	S1	RE	APMX	NCM535	PC3700	PC6510	PC9540	PC5300	PC5400	
	XNMX0606XNR-ML	14	0.98	6.5	0.8	3.5	●		●	●	●	●	●
	XNMX0606XNR-MM new							●	●		●		
	XNMX060608-ML	14	-	6.0	0.8	4.8				●	●	●	●
	XNMX060608-MM new							●	●		●		

▲: Stock item Europe ●: Stock item Korea ○: Production on demand

RM14XCM-XN06

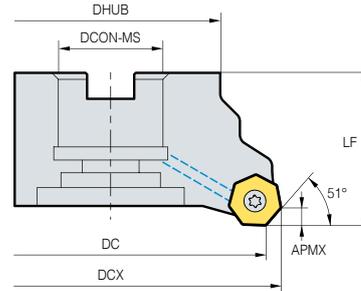

(mm)

Designation		Stock		DC	DCX	DHUB	DCON-MS	LF	APMX	
RM14XCM	050R-22-5-XN06	●	5	50	58.6	42	22	40	3.5	0.34
	050R-22-6-XN06	●	6	50	58.6	42	22	40		0.34
	063R-22-6-XN06	●	6	63	71.6	42	22	40		0.51
	063R-22-8-XN06	●	8	63	71.6	42	22	40		0.58
	080R-27-6-XN06	●	6	80	88.6	57	27	50		0.98
	080R-27-8-XN06	●	8	80	88.6	57	27	50		1.08
	080R-27-10-XN06	●	10	80	88.6	57	27	50		1.07
	100R-32-10-XN06	●	10	100	108.6	67	32	63		1.59
	100R-32-12-XN06	●	12	100	108.6	67	32	63		1.59
	125R-40-12-XN06	●	12	125	133.6	90	40	63		3.43
	125R-40-14-XN06	●	14	125	133.6	90	40	63		3.42
	160NR-40-16-XN06	●	16	160	168.6	110	40	63		4.86
	160NR-40-18-XN06	●	18	160	168.6	110	40	63		4.84

※ In applying XNMX060608- , Max. ap = 4.8mm

※ None : Order made

Available inserts



Designation	Grade							
	NCM535	PC3700	PC6510	PC9540	PC5300	PC5400	PC5535	
XNMX	0606XNR-ML	●		●	●	●	●	●
	0606XNR-MM		●	●		●		
	060608-ML				●	●	●	●
	060608-MM		●	●		●		


Available arbors

Designation	DCON-MS	Arbors
RM14XCM	22	050R BT□□-FMC22-□□
063R		
080R	27	BT□□-FMC27-□□
100R	32	BT□□-FMC32-□□
125R	40	BT□□-FMC40-□□
160R		

Parts

Specification	Screw	Wrench
Diameter		
Ø50 - Ø160	FTKA0412B	TW15S

▲ : Stock item Europe ● : Stock item Korea ○ : Production on demand

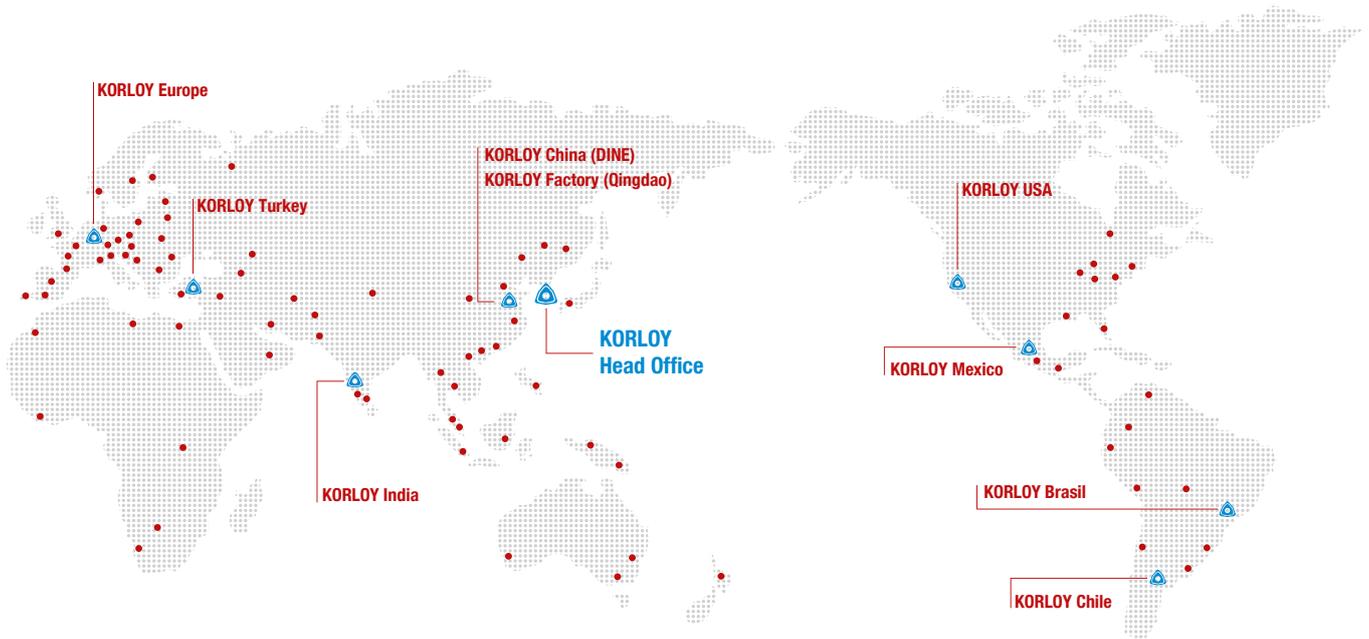

KORLOY Network

Head Office

Holystar B/D, 326, Seocho-daero,
Seocho-gu, Seoul, 06633, Korea,
Web: www.korloy.com

Cheongju Factory

55, Sandan-ro, Heungdeok-gu,
Cheongju-si, Chungcheongbuk-do,
28589, Korea

Jincheon Factory

54, Gwanghyewonsandan 2-gil,
Gwanghyewon-myeon, Jincheon-gun,
Chungcheongbuk-do, 27807, Korea

R & D Institute Seoul

Holystar B/D, 326, Seocho-daero,
Seocho-gu, Seoul, 06633, Korea

R & D Institute Cheongju

55, Sandan-ro, Heungdeok-gu,
Cheongju-si, Chungcheongbuk-do,
28589, Korea

Gurgaon Factory

Plot NO.415, Sector 8, IMT Manesar,
Gurgaon 122051, Haryana, India

KORLOY AMERICA

620, Maple Avenue, Torrance,
CA 90503, USA

KORLOY BRASIL

Av. Aruana 280, conj.12, WLC,
Alphaville, Barueri, CEP06460-010,
SP, Brasil

KORLOY CHILE

Av. Providencia 1650, Office 1009,
7500027 Providencia-Santiago, Chile

KORLOY INDIA

Ground Floor, Property No. 217, Udyog
Vihar Phase 4, Gurgaon 122016,
Haryana, India

KORLOY TURKEY

Serifali Mahallesi, Burhan Sokak NO: 34
Dudullu OSB/Umraniye/Istanbul, 34775,
Turkey

KORLOY MEXICO

Calle R. M. Clemencia Borja Taboada
522, Jurica Acueducto, 76230 Juriquilla,
Qro. Mexico

KORLOY EUROPE

Gablonzer Str. 25-27,
D-61440 Oberursel, Germany
Tel. +49-6171-27783-0
Fax +49-6171-27783-59
Mail: info@korloyeurope.com
Web: www.korloyeurope.eu

KTS - Korloy Total Service



Get our **FREE App**

Just download, install and use.

